

Downhole Memory Camera

The Omega Downhole Memory Camera enables operators to deploy a camera system via Slickline in a cost effective manner.

No requirement for either E-Line equipment/personnel or any other specialized equipment commonly required with alternative systems, greatly enhances both the flexibility and value of Omega's solution.

Obtaining images of a wellbore obstruction or wireline fish, allows operators to fully understand what they are actually up against. Validating the downhole issues can help determine the best course of action, increasing the likelihood of a successful intervention whilst reducing the operator's overall intervention risk and associated costs.

As the tool is fully programmable at the well site, the operator can decide when the camera will start capturing images, the time duration between each image being captured and also the total amount of images to be captured. A maximum of 1000 images can be recorded and subsequently downloaded using a laptop and Omega's camera software. The images can then be saved to CD and/or emailed from location.

Compact design allows for the Omega camera to be deployed when rig up heights are restrictive.

The system is transported inside robust Pelican Briefcases, ensuring that Omega's Downhole Memory Camera can be safely shipped to location in the fastest possible time frame.

Features


- Operator programmable delay time, time interval between images and total of images captured.
- Standard wireline 15/16" Sucker Rod connection.
- High Intensive LED's illuminate viewing area.
- Detachable battery module, enabling ease of 'at location' replacement.
- High quality Sapphire optical lens.
- Compact design enables deployment in restrictive rig ups.

Applications

- Mechanical Inspections, such as parted tubing / corrosion / obstructions / restrictions.
- Wireline and drilling Fishing operations.
- Gas lift and SCSSV valve inspection.
- Scale and Organic build up survey.

Benefits

- Highly portable Downhole camera system.
- Captures 1000 images per run.
- Deployed on standard Slickline wire / Coiled Tubing.
- May significantly reduce Operator intervention costs.

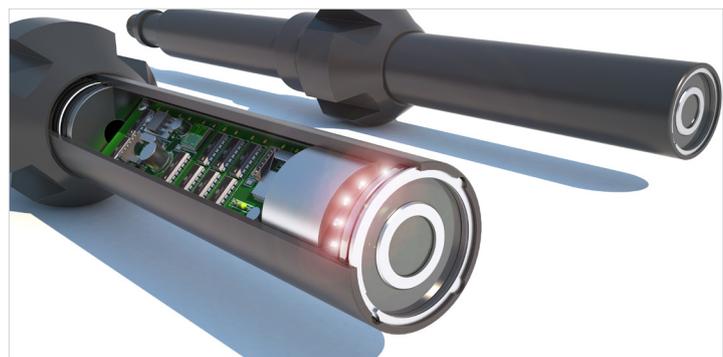

Technical Specifications

Camera Tool OD	1.750" (44.45mm)
Fishing Neck Size	1.375"
Max Pressure	7,500 psi
Max Temperature*	120°C (248°F)
Tool Length	21.77" (553mm) (To Fishing Neck)
Tool Weight	3.64kg (8.024 lbs)

*Rating of camera electronics.

Note:

Overall BHA length may increase if the bow spring centraliser is utilized during deployment of Omega's DownHole Memory Camera.

Contact Omega representative to discuss Well Preparation for Camera interventions, as ensuring that the wellbore environment is optically clean is essential in obtaining good quality images.

